



CHAPTER 11. OPTIONS

1. CE-301CB [for Printer] – Standard option of U.Y Version –

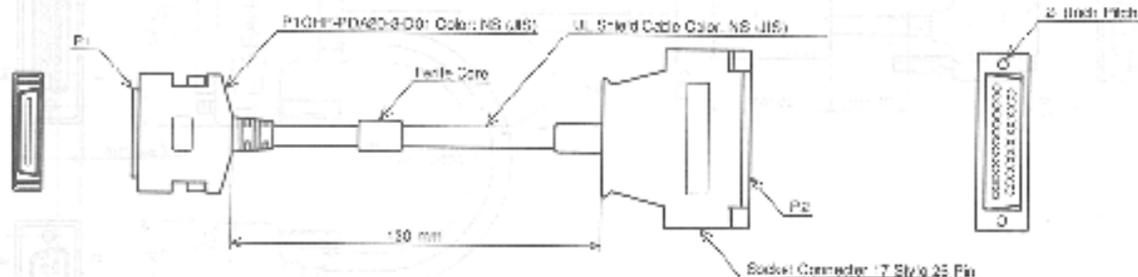


P1 (20pin)				P2 (25pin)			
1	STB	11	BLSY	1	STB	11	BUSY
2	D0	12	PE	2	D0	12	PE
3	D1	13	SEL	3	D1	13	SEL
4	D2	14	AUTO	4	D2	14	AUTO
5	D3	15	ERROR	5	D3	15	ERROR
6	D4	16	INIT	6	D4	16	INIT
7	D5	17	SELIN	7	D5	17	SELIN
8	D6	18	GND	8	D6	18	GND
9	D7	19	GND	9	D7	19	GND
10	ACK	20	GND	10	ACK	20	GND

2. CE-302CB [for RS-232-C] – Standard option of U.Y Version –

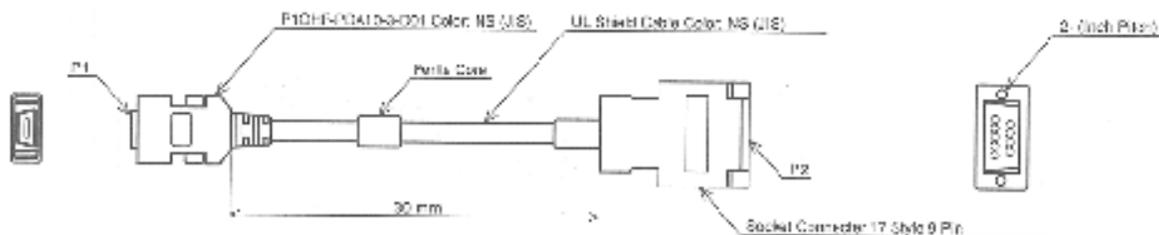

P1 (10pin)				P2 (9pin)			
1	DCD	6	DSR	1	DCD	6	DSR
2	RX	7	RTS	2	RX	7	RTS
3	TX	8	CTS	3	TX	8	CTS
4	DTR	9	RI	4	DTR	9	RI
5	GND	10	(VOC)	5	GND		

3. CE-303CB [LAP LINK CABLE]

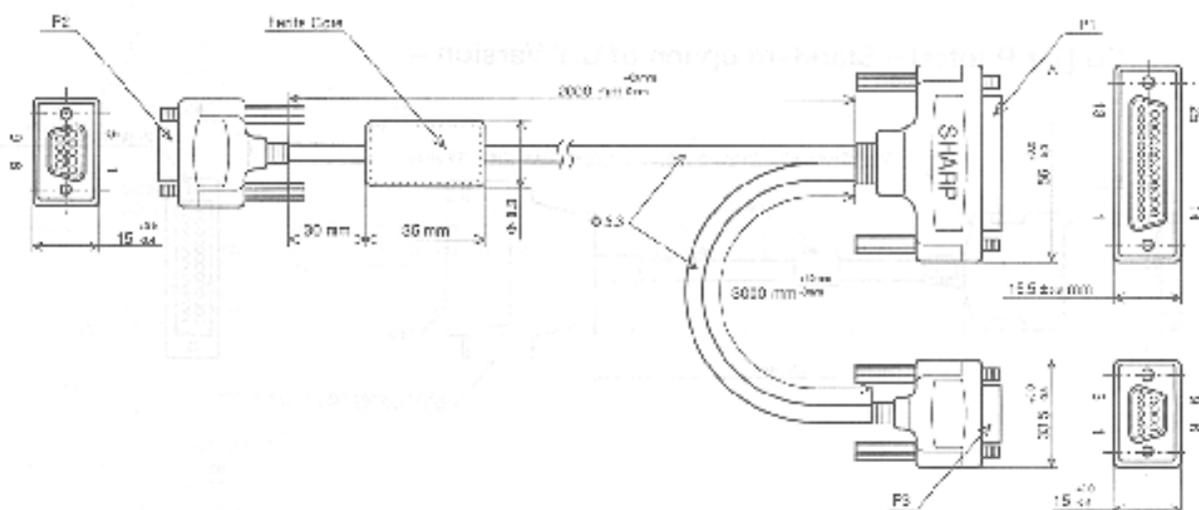

Materials:

- Cables: 7 Conductors, 26AWG, UL2464, Double Shield, Gray Color, Circle Diameter $\phi 6.3$ mm - BFL.
- "D" Connector
 - DB-29S-10 1pcs
 - DB-09S-10 2pcs
- Phosphor Bronze with 10 μ Gold Plating on contact area.
- Thumb Screw, Gray Color - 6pcs.
- Aluminium Label with "SHARP" logo - 1pcs.
- Copper Foil (For shielding) - 6pcs.

PIN CONNECTION TABLE

P2	P1	P3
DB-29S-10	DB-29S-10	DB-09S-10
PIN 2	PIN 2	PIN 3
PIN 3	PIN 3	PIN 2
PIN 8	PIN 4	PIN 7
PIN 7	PIN 5	PIN 8
PIN 4	PIN 6	PIN 6
PIN 5	PIN 7	PIN 5
PIN 6	PIN 20	PIN 4
SHIELD	SHIELD	SHIELD